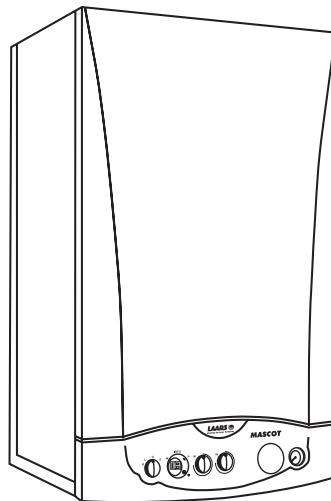


MASCOT

Condensing Boilers

HT 330	Combi Boiler / Water Heater
HT 1.330	Boiler
HT 1.450	Boiler
HT 1.650	Boiler

Submittal Data **LAARS** 
Heating Systems Company

Standard Equipment


- Designed and constructed in accordance with the ASME Boiler & Pressure Vessel Code, Sections II, IV, and IX
- Design certified and tested to ANSI standard Z21.13
- Fully condensing (96% thermal efficiency at full input)
- Sealed stainless steel combustion chamber
- Welded stainless steel heat exchanger
- 2-character alphanumeric display of temperatures and fault codes
- Stainless steel burner
- Zero clearance from vent when concentric vent system is used
- Built-in back flow preventer (1.330 & 330)
- Supervised spark ignition
- Fully modulating gas valve
- Variable speed blower
- Diagnostic LEDs
- DHW priority (330)
- Wall-mounting template
- Freeze protection assistance - attempts to run boiler and boiler pump when water temperature goes below 41°F (5°C)
- Built-in circulating pump and bypass (1.330 & 330)
- Natural or propane gas (no parts changes needed for conversion)
- Stainless steel brazed plate DHW heat exchanger (330)
- Outdoor reset ready - just add outdoor air sensor
- Built-in air vent (1.330 & 330)
- Built-in relief valve
- Built-in boiler drain valve (1.330 & 330)
- Built-in manual system fill valve (1.330 & 330)
- Built-in low water cutoff
- Built-in pressure gauge
- Built-in low water cutoff
- Pump exerciser
- Pump time delay
- Connection valve kit (1.330 & 330)
- Built-in expansion tank (1.330 & 330)

Specifications

		HT 330	HT 1.330	HT 1.450	HT 1.650
Input, max fire	BTU/h kW	126,376	37.0	126,376	37.0
Input, minimum fire	BTU/h kW	37,192	10.9	37,192	10.9
Output, maximum fire	BTU/h kW	112,601	33.0	112,601	33.0
Output, minimum fire	BTU/h kW	32,804	9.6	32,804	9.6
Max. DHW flow rate (dt@80°F)	gpm / l/m	3.6	14	N/A	N/A
Max. boiler pressure	psi / kPa	30	207	30	207
Min. DHW pressure	psi / kPa	2.9	20	N/A	N/A
Max. DHW pressure	psi / kPa	116	800	N/A	N/A
Height	in / cm	30.0	76	30.0	76
Width	in / cm	17.7	45	17.7	45
Depth	in / cm	13.6	35	13.6	35
Concentric vent-air	in / cm	2.36-3.93	6-10	2.36-3.93	6-10
Weight	lbs / kg	103	47	102	46
Voltage	V	120		120	
Frequency	Hz	60		60	
Service	Amps	15		15	

Dimensions

Sizes HT 330 and HT 1.330

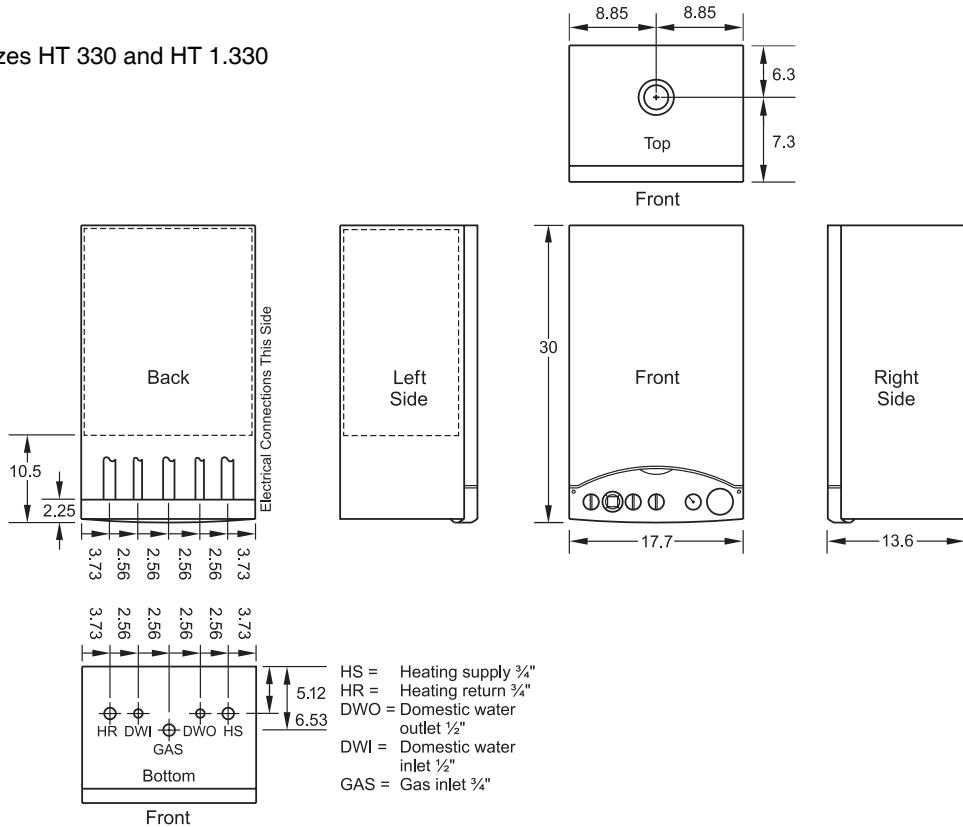

Sizes HT 1.450 and HT 1.650

